This document must not be copied without our consent, nor must its contents be made known to others or otherwise unauthorizedly used. All data subject to change without notice. Century

C	B	A	MARK	REVISION RECORD	DATE	REVISED BY	CHECK.BY	APPO.
			△					
			△					
			△					
			△					

PA – W(140,224,300)GG1(3ø) 멧땐 짰y빔

** NOTE **

1. ○ : 뱒횈sc휴
2. 뱒횈뫫 ① sc ⑤ sc 촐괘컬 COOLINNG TOWER 멧횈뉪?뗍 겗흋쓮 은목 횠덩? 덣.
3. E.H.C. 내장형 제품에적용시
4. 원격운전제품에 적용시
5. CENTURY SCORLL 적용시
6. -------- : FIELD WIRING
7. E.H.C 2STEP 적용시

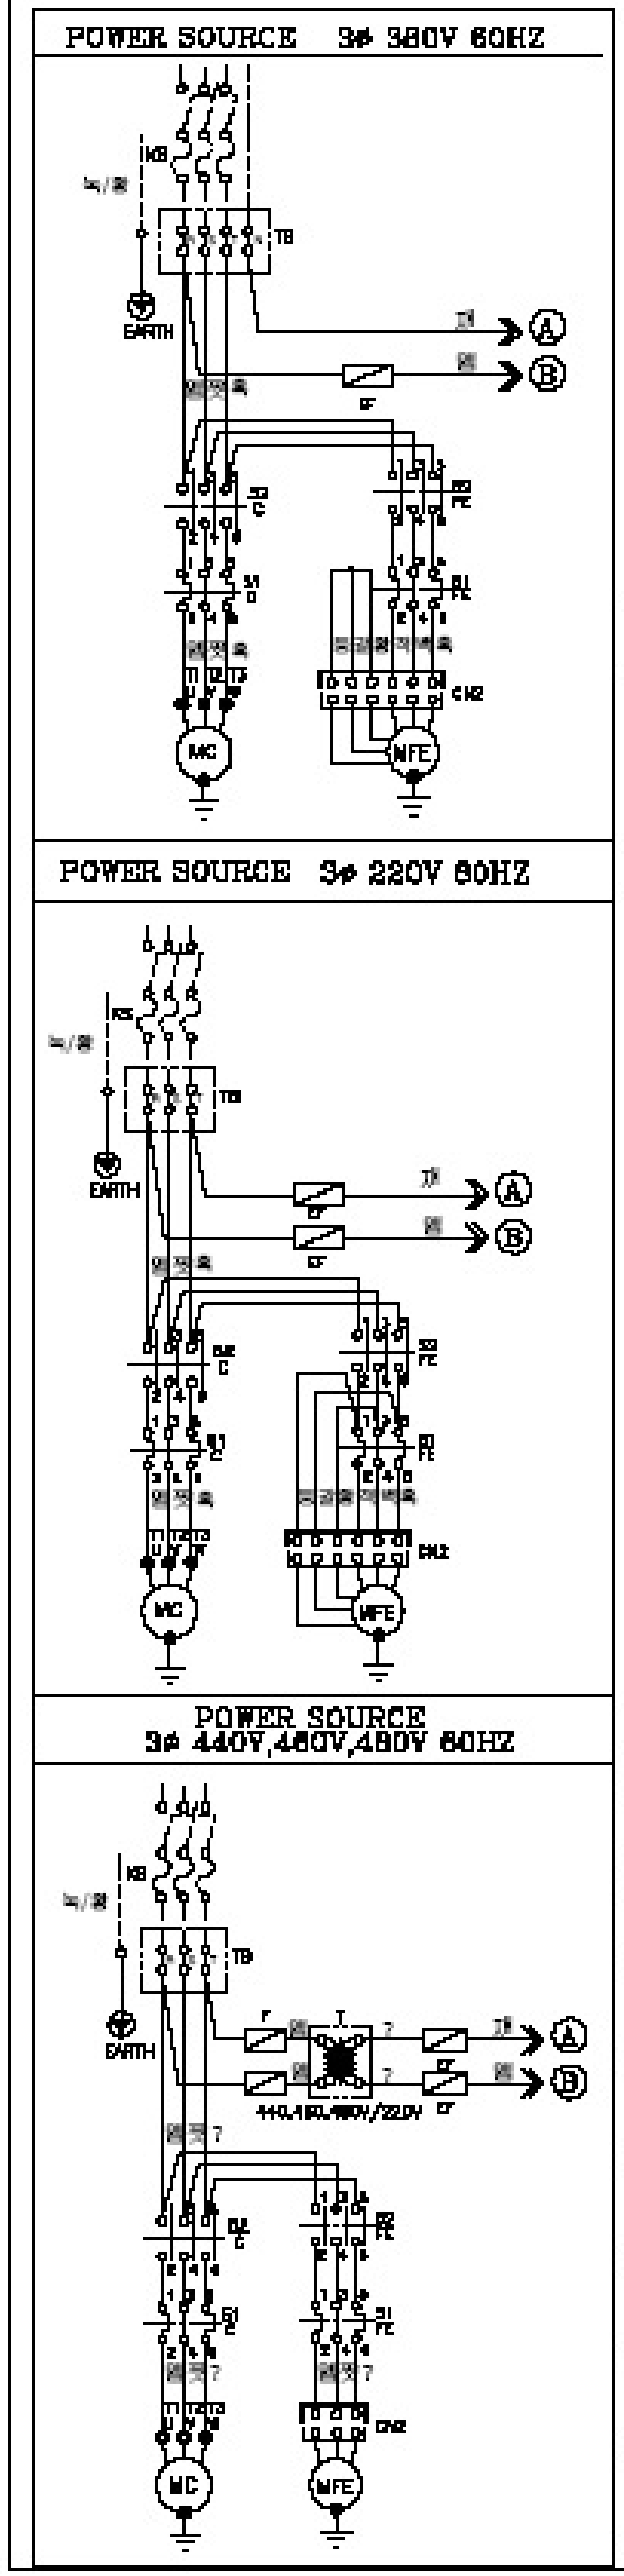
POWER SOURCE 3ø 380V 60HZ
KS
녹/황
TB
EARTH
A
B
EF
52 C
52 FE
51 C
51 FE
CN2
MC
MFE
POWER SOURCE 3ø 220V 60HZ
POWER SOURCE 3ø 440V,460V,480V 60HZ
440,460,480V/220V

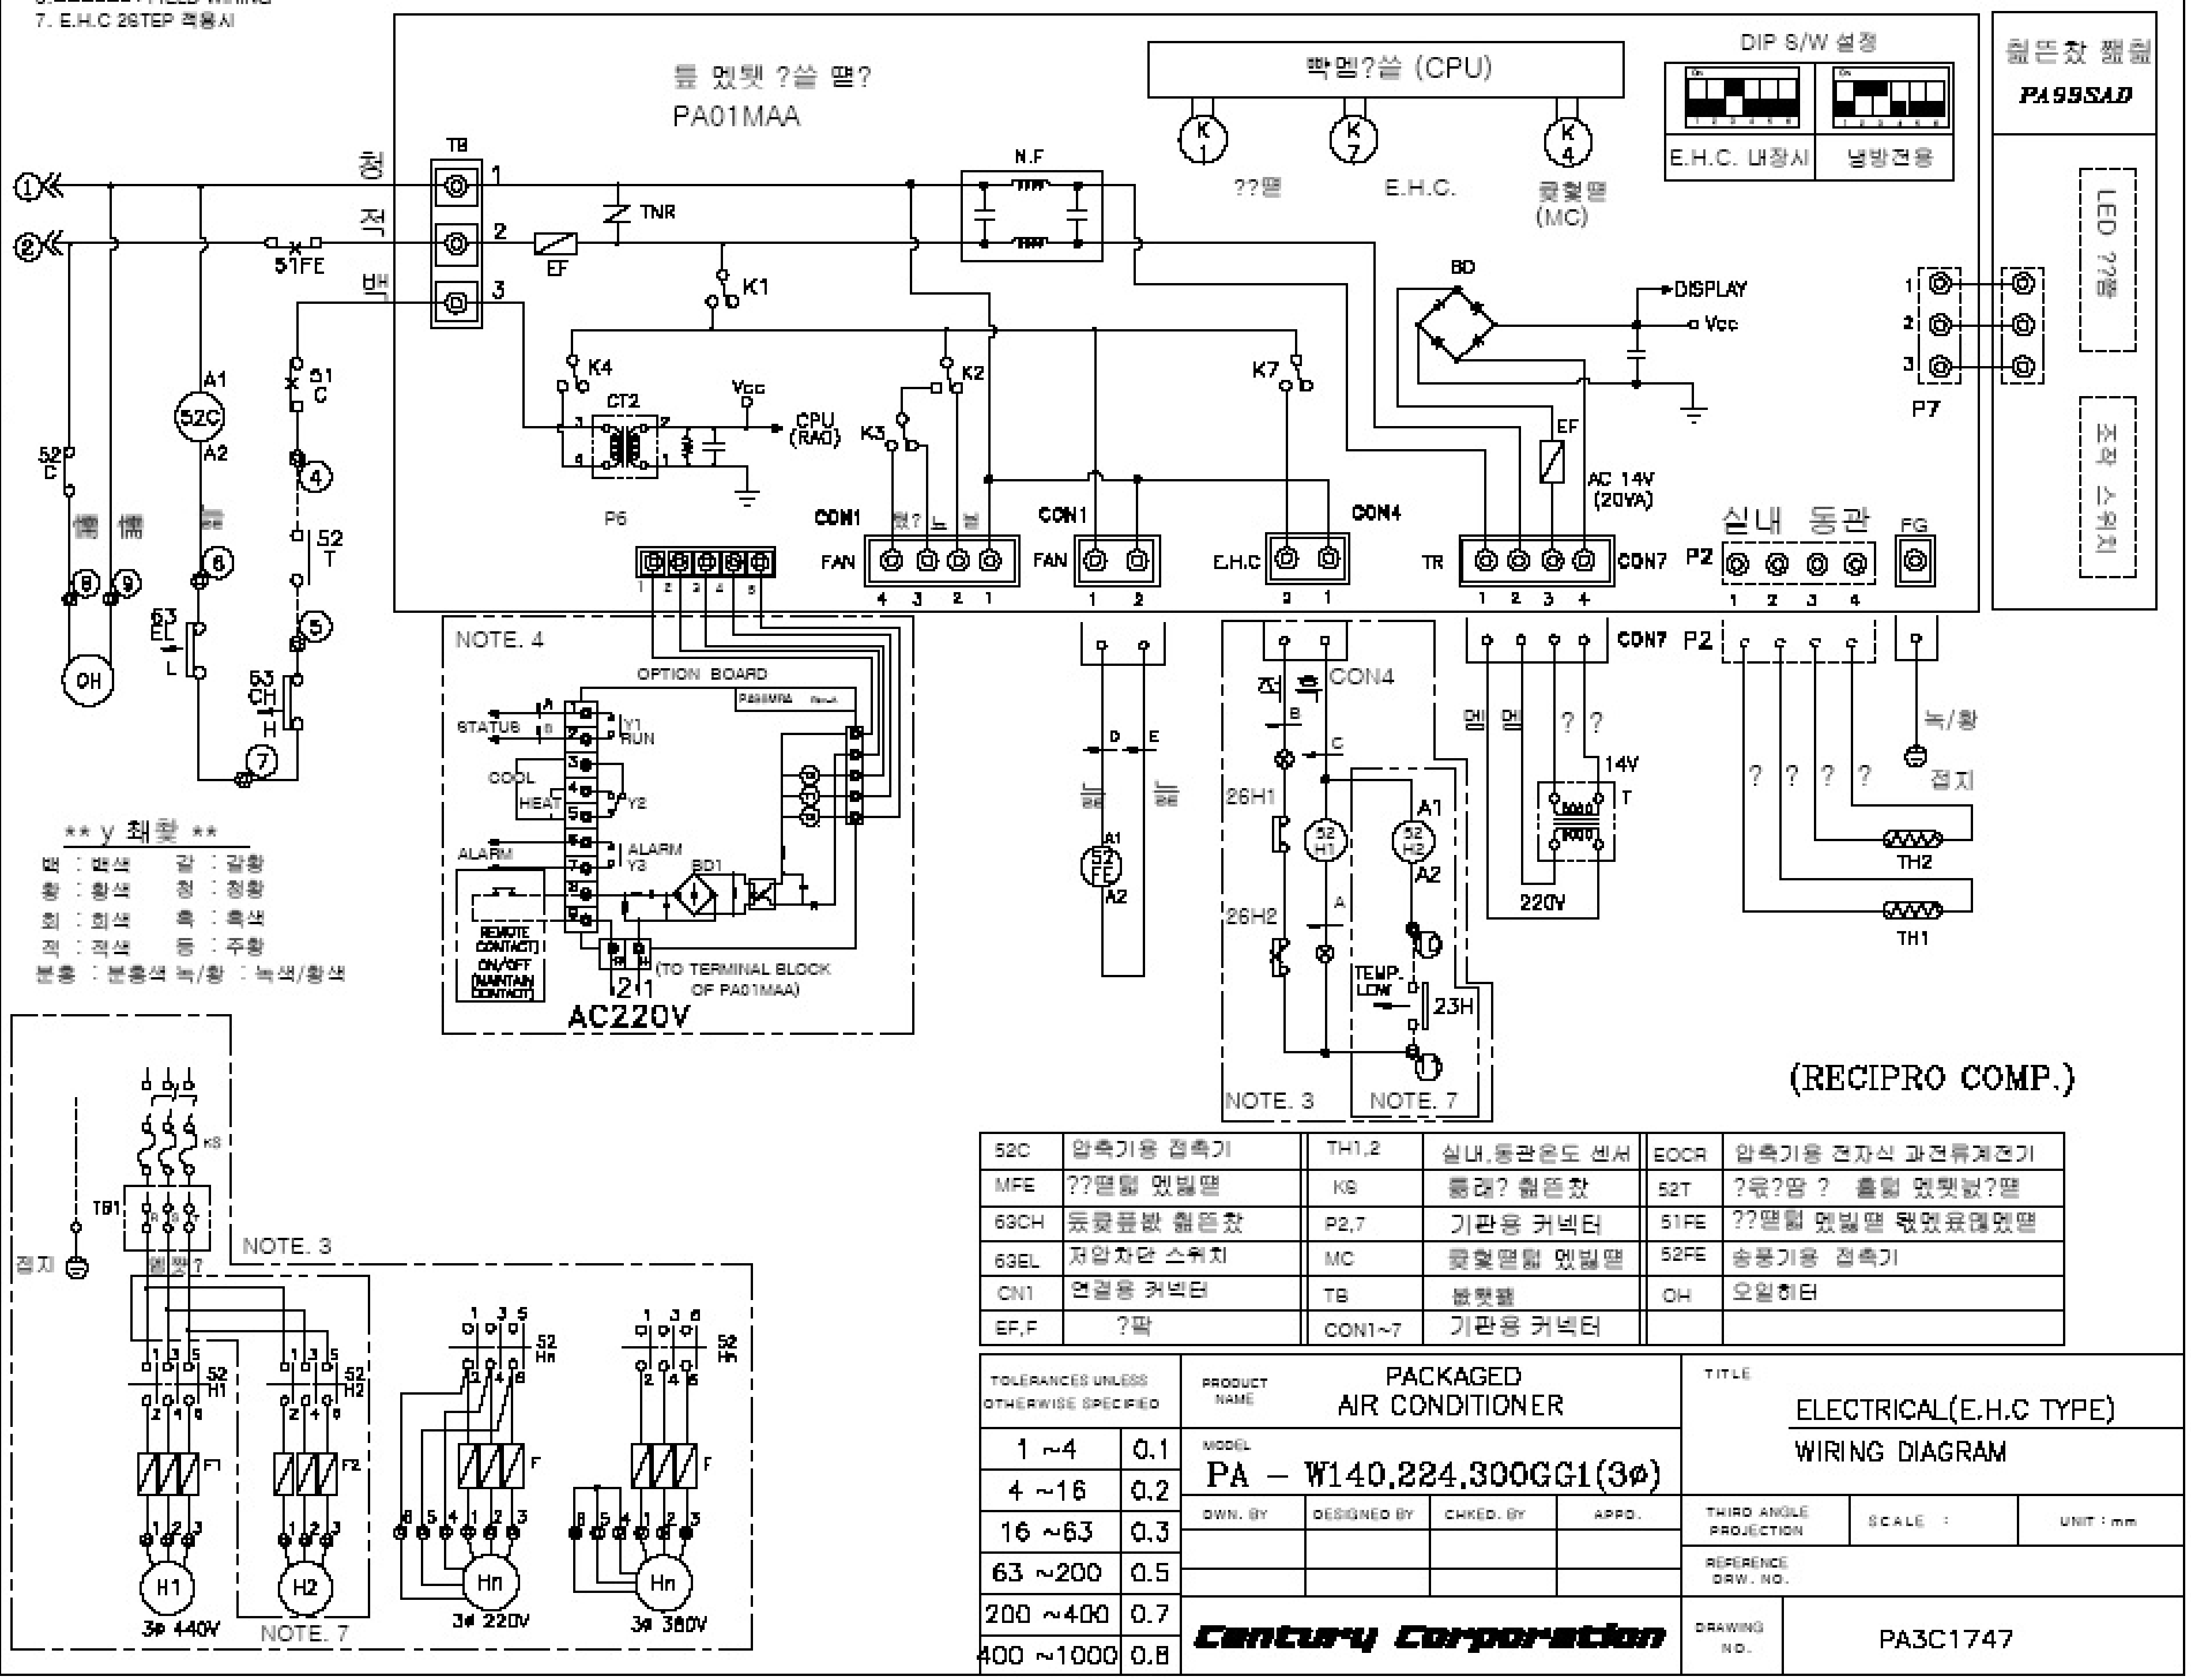
틀 멧횈 ?쓸 땐?
PA01MAA
빡멥?쓸 (CPU)
K 1
K 7
K 4
??땐
E.H.C.
궂헿땐 (MC)
DIP S/W 설정
E.H.C. 내장시
냉방전용
훨뜬찮 쨃훨
PA99SAD
LED ??램
조작 스위치
TB
청
적
백
1
2
3
TNR
N.F
EF
51FE
K1
K4
K2
K3
K7
CT2
P6
Vcc
CPU (RA0)
BD
DISPLAY
Vcc
AC 14V (20VA)
P7
52 C
A1
52C
A2
51 C
52 T
63 EL
63 CH
L
H
OH
CON1
FAN
CON4
E.H.C
TR
CON7
P2
실내 동관
FG
NOTE. 4
OPTION BOARD
STATUS
Y1 RUN
COOL
HEAT
Y2
ALARM
Y3
BD1
REMOTE CONTACT) ON/OFF (MAINTAIN CONTACT)
(TO TERMINAL BLOCK OF PA01MAA)
AC220V
52 FE
D
E
26H1
26H2
52 H1
52 H2
TEMP. LOW
23H
NOTE. 3
NOTE. 7
14V
T
220V
TH2
TH1
녹/황
접지
(RECIPRO COMP.)
접지
TB1
KS
52 H1
52 H2
F1
F2
H1
H2
3ø 440V
52 Hn
F
Hn
3ø 220V
3ø 380V

** y 채뽗 **

백	백색	갈	갈황
황	황색	청	청황
회	회색	흑	흑색
적	적색	등	주황
분홍	분홍색	녹/황	녹색/황색

52C	압축기용 접촉기	TH1,2	실내,동관온도 센서	EOCR	압축기용 전자식 과전류계전기
MFE	??땐턻 멧빌땐	KS	툶래? 휣뜬찮	52T	?윿?땀 ? 흁턻 멧횈뉪?땐
63CH	듌궂픒뱒 휣뜬찮	P2,7	기판용 커넥터	51FE	??땐턻 멧빌땐 뒍멧윮뎹멧땐
63EL	저압차단 스위치	MC	궂헿땐턻 멧빌땐	52FE	송풍기용 접촉기
CN1	연결용 커넥터	TB	뱒횈뫫	OH	오일히터
EF,F	?팍	CON1~7	기판용 커넥터		

TOLERANCES UNLESS OTHERWISE SPECIFIED	
1 ~4	0.1
4 ~16	0.2
16 ~63	0.3
63 ~200	0.5
200 ~400	0.7
400 ~1000	0.8

PRODUCT NAME: PACKAGED AIR CONDITIONER

MODEL: PA – W140,224,300GG1(3ø)

DWN. BY	DESIGNED BY	CHKED. BY	APPO.

Century Corporation

TITLE: ELECTRICAL(E.H.C TYPE) WIRING DIAGRAM

THIRD ANGLE PROJECTION

SCALE :

UNIT : mm

REFERENCE DRW. NO.

DRAWING NO. PA3C1747